


FLARE

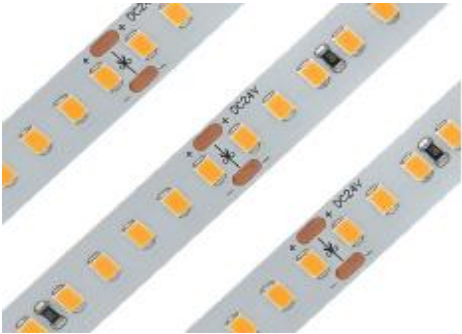

STRIP LIGHT

	W	K	Lumen	L/W	CRI
FLP2835.160C.19.27	19.2	2700K	2187	113.9	≥80
FLP2835.160C.19.3		3000K	2277	118.6	≥80
FLP2835.160C.19.4		4000K	2430	126.6	≥80
FLP2835.160C.19.5		5000K	2475	128.9	≥80

SMD	24V	IP66	50,000h
DALI	1/10V	PUSH	120°

Tec.Specifications:

LED flexible strip light with silicone tube applicable to water environment

Material: Made of high quality FPC board

Flexible white circuit which comes in 10mm width to apply more heat release. The product is supplied in 5 meter coils

Supplied with connection cable on both sides for connections in line or power supply

The back of the circuit is provided with adhesive tape for quick application

Number of leds/meter: 160

Voltage: 24V DC

LED Type: SMD

CRI: >80

Mini. Segment: 50mm

LED Pitch: 6.25mm

IP Rating: 66