


FLARE

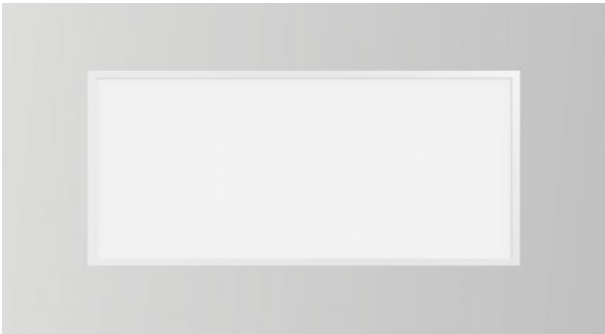

SMD	230V	IP20	50,000h
DALI	I/10V	PUSH	90°

Technical Specifications:

False ceiling recessed panel light

Material: Made of aluminum steel sheet frame

Light emitting: Edge light, 2 LED SMD lamps on two edges

Diffuser: PMMA, opal diffuser With steel sheet on the back side of the luminaire

LED Type: SMD

CRI: >80

UGR: <22

Diffuser: Opal diffuser

Driver: Remote driver

Dimming: Option to apply DALI / I-10 V / trailing edge dimmable driver

IP Rating: 20

Dimming Option:

DALI	D
I-10V	V
Push	P

Dimensions:

Watt	W	D	H
40	595	1195	10

LEV-595

	W	K	Lumen	L/W	CRI
FLP6064.50.3	50	3000K	5069	101.3	≥80
FLP6064.50.4		4000K	5271	105.4	≥80

