


FLARE

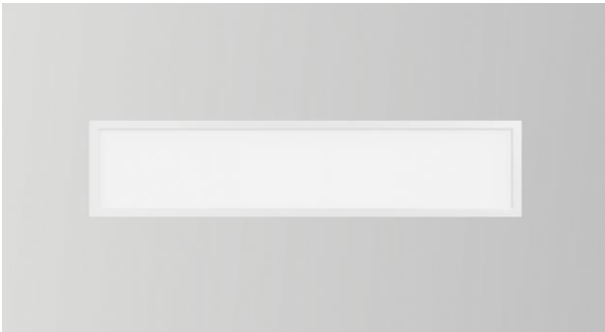

SMD	230V	IP20	50,000h
DALI	I/I0V	PUSH	90°

Technical Specifications:

False ceiling recessed panel light

Material: Made of aluminum steel sheet frame

Light emitting: Edg light, 2 LED SMD lamps on two edges

Diffuser: PMMA, opal diffuser With steel sheet on the back side of the luminaire

LED Type: SMD

CRI: >80

UGR: <22

Diffuser: Opal diffuser

Driver: Remote driver

Dimming: Option to apply DALI / I-10 V / trailing edge dimmable driver

IP Rating: 20

Dimming Option:

DALI	D
I-10V	V
Push	P

Dimensions:

Watt	W	D	H
40	295	1195	10

LEV-295

	W	K	Lumen	L/W	CRI
FLP6063.40.3	40	3000K	4189	104.7	≥80
FLP6063.40.4		4000K	4222	105.5	≥80

