


FLARE

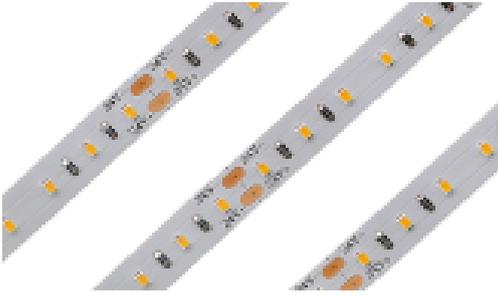

STRIP LIGHT

| | W | K | Lumen | L/W | CRI |
|------------------|-----|-------|-------|------|-----|
| FL2216.120.96.27 | 9.6 | 2700K | 720 | 75 | ≥90 |
| FL2216.120.96.3 | | 3000K | 750 | 78.1 | ≥90 |
| FL2216.120.96.4 | | 4000K | 770 | 80.2 | ≥90 |
| FL2216.120.96.5 | | 5000K | 770 | 80.2 | ≥90 |

| | | | |
|------|-------|------|---------|
| SMD | 24V | IP20 | 50,000h |
| DALI | I/10V | PUSH | 120° |

Technical Specifications:

LED flexible strip light

Material: Made of high quality FPC board

Flexible white circuit which comes in 10mm width to apply more heat release. The product is supplied in 5 meter coils

Supplied with connection cable on both sides for connections in line or power supply

The back of the circuit is provided with adhesive tape for quick application

Number of leds/meter: 120

Voltage: 24V DC

LED Type: SMD

CRI: >90

Mini. Segment: 50mm

LED Pitch: 8.33mm

IP Rating: 20

