


FLARE

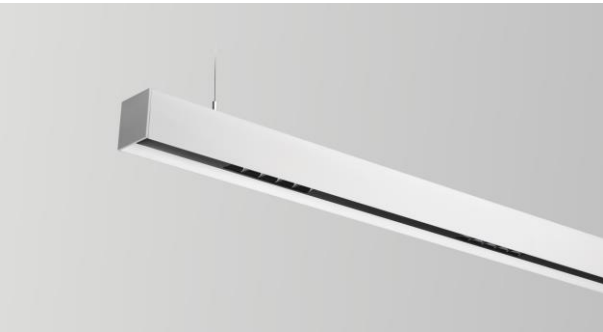

SMD	230V	IP20	50,000h
DALI	I/10V	PUSH	30°

Tec. Specifications:

Direct light modular system with LED lamps

Material: The structure is made of extruded aluminum, with end caps on both sides
Can be used in different dimensions or as a continuous line

Fixing Type: Luminaire can be surface mounted or suspended with suspension kit

Optics: 2 or more groups of 5 rectangular modular mini spot light

LED Type: SMD

CRI: >80

UGR: <19

Driver: Integrated driver in the luminaire

Dimming: Option to apply DALI / I-10 V / trailing edge dimmable driver

IP Rating: 20

Dimming Option:			Frame colors:	
●	DALI	D	White	W
●	I-10V	V	Black	B
●	Push	P		

Dimension:

Watt	L	W	H
18	570	60	82
30	850	60	82
40	1130	60	82
50	1410	60	82

CLINE SPOT

	W	K	Lumen	L/W	CRI
FL0326.18.3	18	3000K	1700	93.3	≥80
FL0326.18.4		4000K	1710	95	≥80
FL0326.30.3	30	3000K	2520	84	≥80
FL0326.30.4		4000K	2610	87	≥80
FL0326.40.3	40	3000K	3400	84	≥80
FL0326.40.4		4000K	3480	87	≥80
FL0326.50.3	50	3000K	4250	100.8	≥80
FL0326.50.4		4000K	5130	102.6	≥80

